


# 10'x10' Instant Canopy Push up riser Replacement AIS

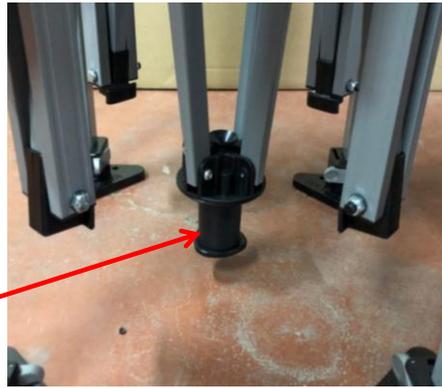

## 一、Disassembly

1. Half-open the frame, use the No.4 Allen Wrench to loosen the screws connected the push up riser with the Inner Truss.

2. Remove all the screws and lay aside for further use.

3. Take off the broken push up riser.



## 二、Install

1. Take a new push up riser, install the inner trusses into it and then fix with the screws.

2. Use the NO.4 Allen Wrench to tighten the screws in turn. The replacement is completed.

