



Lay down the umbrella



Remove the plastic cap




Unsrew and remove the Aluminum cap



Remove all screws on connector



Take out the three caps

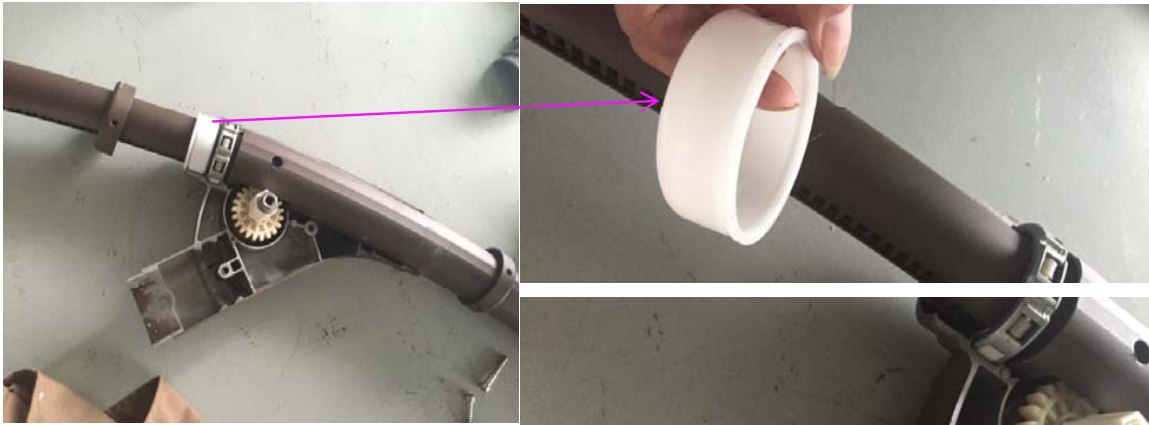

Disassemble the connector      Take out the part to replace, and assemble at reverse order



Tools required: two wrenches