



Lay down the umbrella



Remove the plastic cap




Unscrew and remove the Aluminum cap



Remove all screws on connector



Take out the three caps

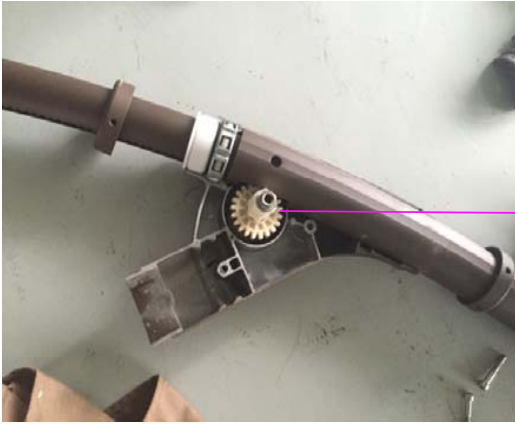

Disassemble the connector, take out the wheel components for replacement, and assemble at reverse order

Tools required: two wrenches