



Lay down the umbrella



Remove the plastic cap





Unscrew and remove the Aluminum cap



Remove all screws on connector



Take out the three caps

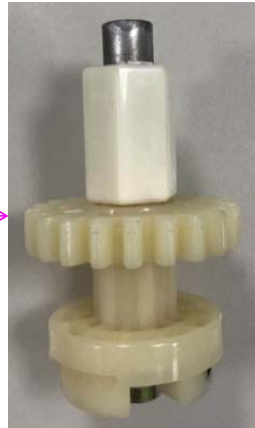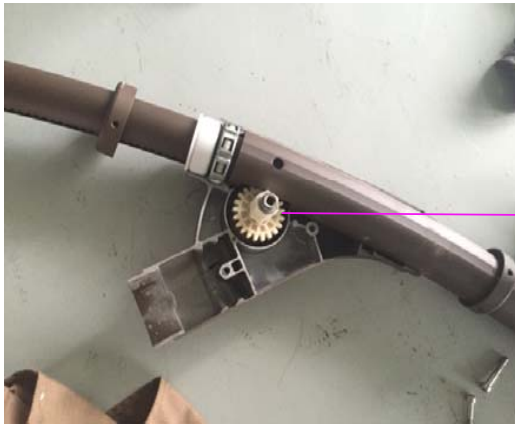

Disassemble the connector, take out the wheel components for replacement, and assemble at reverse order



Tools required: two wrenches